


ca. 125

ca. 265

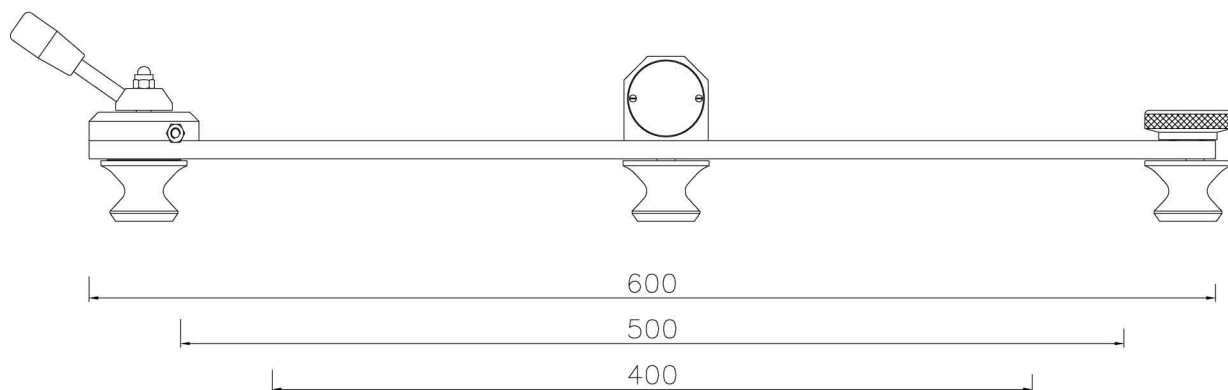

bracket width

Roller variants




for cable Ø 3-12mm

R12



for cable Ø12-54mm


R50



Ribbon Roller

for several flat materials

RR(X)



material path

dimensions (mm)
weight: approx. 2000g



Albuquerque Industrial
69-10 108th Street # 2-0
Forest Hills, NY 11375 U.S.A.

www.abqindustrial.net
e-mail: info@abqindustrial.net
Toll Free: +1 (888) 275-5772
Tel: +1 (718) 846-6458
Fax: +1 (718) 846-6459

Schutzvermerk nach DIN 34 beachten		Allgemein- toleranz DIN 7168-f	Pr.Nr.	Maßstab 1:2 / A2	Mod.: CB
				Werkstoff	
		Datum	Name	Tension sensor	
		Erst. 01.04.09	ch		
		Gepr.			
		Norm			
		I.St. 14.04.09	ch	Lock-lever on the rear	
			Z.-Nr.: K 691435		Blatt 1 v. 1Bl.
Zust.	Änderung	Datum	Name	Urspr. K674968	Ers. für Z.Nr.:
					ers. durch Z.Nr.: