

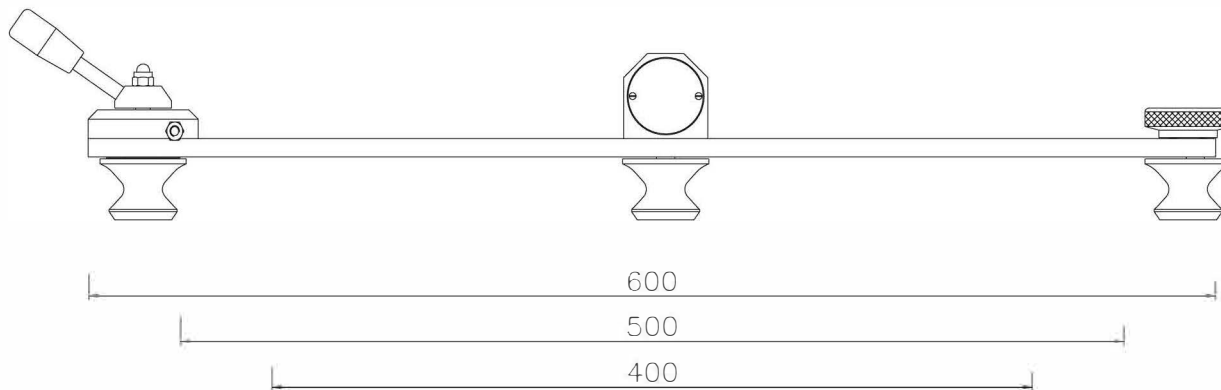


Distributed by: ABQ Industrial LP USA
 Tel: +1 (281) 516-9292 / (888) 275-5772 eFax: +1 (866) 234-0451
 Web: https://www.abqindustrial.net E-mail: info@abqindustrial.net

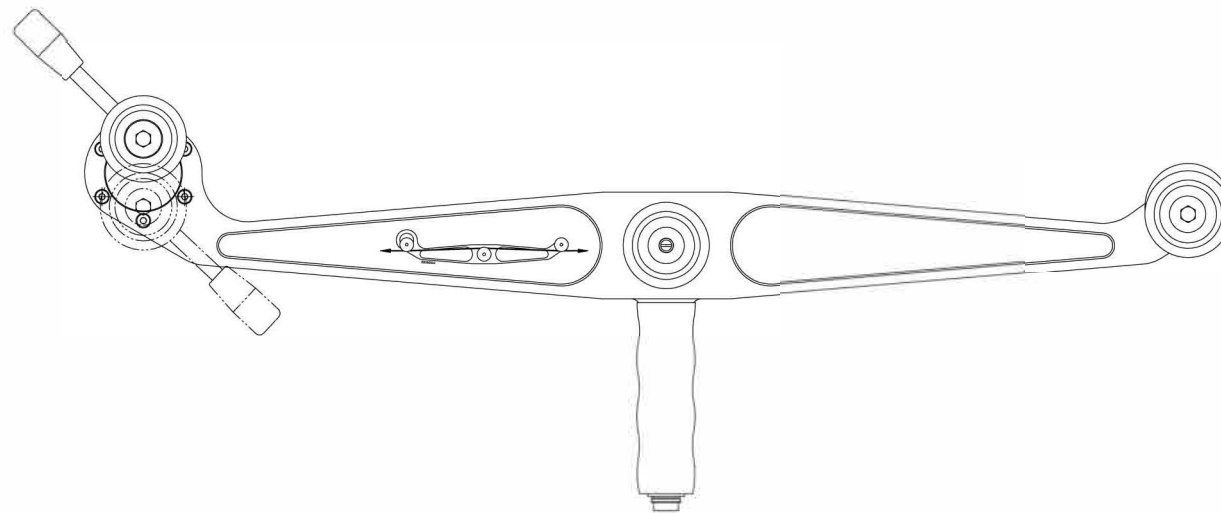


bracket width



material path

dimensions (mm)
 weight: approx. 2000g

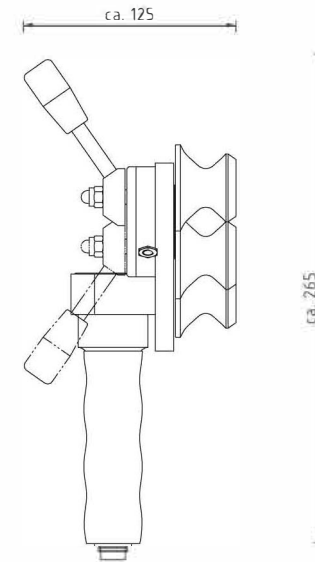

Roller variants



for cable Ø 3-12mm

R12



for cable Ø 12-54mm

R50



Ribbon Roller
 for several flat materials

RR(X)

Schutzvermerk nach DIN 34 beachten				Allgemein- toleranz DIN 7168-f		Pr.Nr.	Maßstab 1:2 / A2	Mod.: C
						Werkstoff		
				Datum	Nome	Tension sensor		
				Erst. 01.04.09	ch			
				Gepr.				
				Norm				
				I.St. 14.04.09	ch	Lock-lever on the rear		
						Z.-Nr.: K 691435		Blatt 1 v. 1B
Zust.	Änderung	Datum	Nome	Urspr. K674968	Erst. für Z.Nr.:		Iers. durch Z.Nr.:	