

Bulletin N610-1

# Ultra-reliable MECHANICAL TENSION METERS

## DX2 Series

10 ranges, 5–50 g to 5–20 Kg

A precise jeweled movement, choice of ball bearing mounted rollers and rugged cast alum-inum housing makes the DX2 ideal for the toughest production floor application.

Built-in mounting holes permit fixed installation for continuous in-line use.

### FEATURES

- Thumb-operated, roller-shifting mechanism and exclusive snare-guide automatically guides the moving filament into the V-grooves eliminating breaks and snags.
- Front filament loading permits the operator to observe running material, rollers and dial face at all times.



DX2-40

- DX2's are individually calibrated for highest accuracy
- DX2's hard-coated aluminum, V-grooved rollers are rated for speeds up to 2000 m/min or, optionally up to 5000 m/min.
- Built-in material thickness compensator maximizes accuracy when using filaments of different diameters.\*

- NIST calibration available.



Model DXL-5K with 250 mm spacing between outer rollers.

Model Prefix	DX2										DXX	
Range Code	5	12	20	40	SP	EX	200	500	1K	2K	3K	5K
Tensions (g)	5–50	10–120	10–200	10–400	20–1000	100–1000	200 –2000	400–5000	2–10 Kg	5–20 Kg	5–30 Kg	5–50 Kg

Complete model number includes: DX2 plus range code, e.g., DX2-200.

\* Supplied on DX2-SP models and higher ranges.

## DX2 Series


### Options

#### Air Damping (A)



An adjustable, precision air dashpot provides steady tension readings as tensions fluctuate.

#### Lever (L)

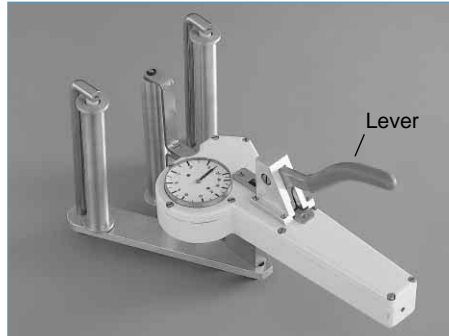

A heavy-duty, lever-operated mechanism moves the outer rollers for easy acquisition of the running filament. Recommended for models of 10 Kg or higher.

#### Memory Pointer (M)



Designed to retain the peak tension value as tensions fluctuate. Manually reset by using the knob located in the center of the dial.

#### High Speed Bearings (K)



Rated for speeds up to 3500 m/min.

#### Ultra High Speed Roller Assembly (HS)



Rated for speeds up to 5000 m/min.

### Model Data & Specifications

<b>Accuracy*</b>	±1% of full scale or ±1 graduation mark on scale	<b>Roller Material (standard)</b>	Hard-coated aluminum
<b>Diameter of Scale</b>	41 mm	<b>" " (optional)</b>	Hardened steel (ST) Chromed Steel (W) Ceramic (CE) Plastic (PL)
<b>Maximum Speed (standard)</b>	2000 m/min	<b>Housing material</b>	Die-cast aluminum
<b>" " (optional)</b>	3500 m/min (K)	<b>Dimensions</b>	225 x 90 x 44 mm (8.6" x 3.5" x 1.7")
<b>" " "</b>	5000 m/min (HS)	<b>Weight</b>	500 g (1.1 lbs.), approx.
<b>Outer roller distance, c:c</b>			
DX2-5 to DX2-EX	38 mm		
DX2-200 to DX2-1K	100 mm		
DX2-2K	150 mm		
DXX-3K to DXX-5K	250 mm		

\* Using factory material standards and procedures. Special calibration using customer sample is available.

Specifications subject to change without notice.